

# Standard size card switch

## Signage

The standard size card switch gives a high aesthetic touch.

- Metal frame
- Tempered glass
- RFID card switch
- Time delay on card switch
- Available in 2 versions 12V or 230V. 12V connects to multirelay or low voltage relays & 230V connects to high voltage relays
- Max load 20A (230V version)
- Optionally card switch can be connected to BMS
- Dimensions: 86 x 86 x 41 mm
- Low consumption: 5W
- Power supply: 230V or DC/AC 12V
- Easy to install
- Suitable for mounting in square installation boxes

— Available in 2 version  
(12V & 230V)

*Choose your color*



Black




Champagne



White



Profile view / metallic frame

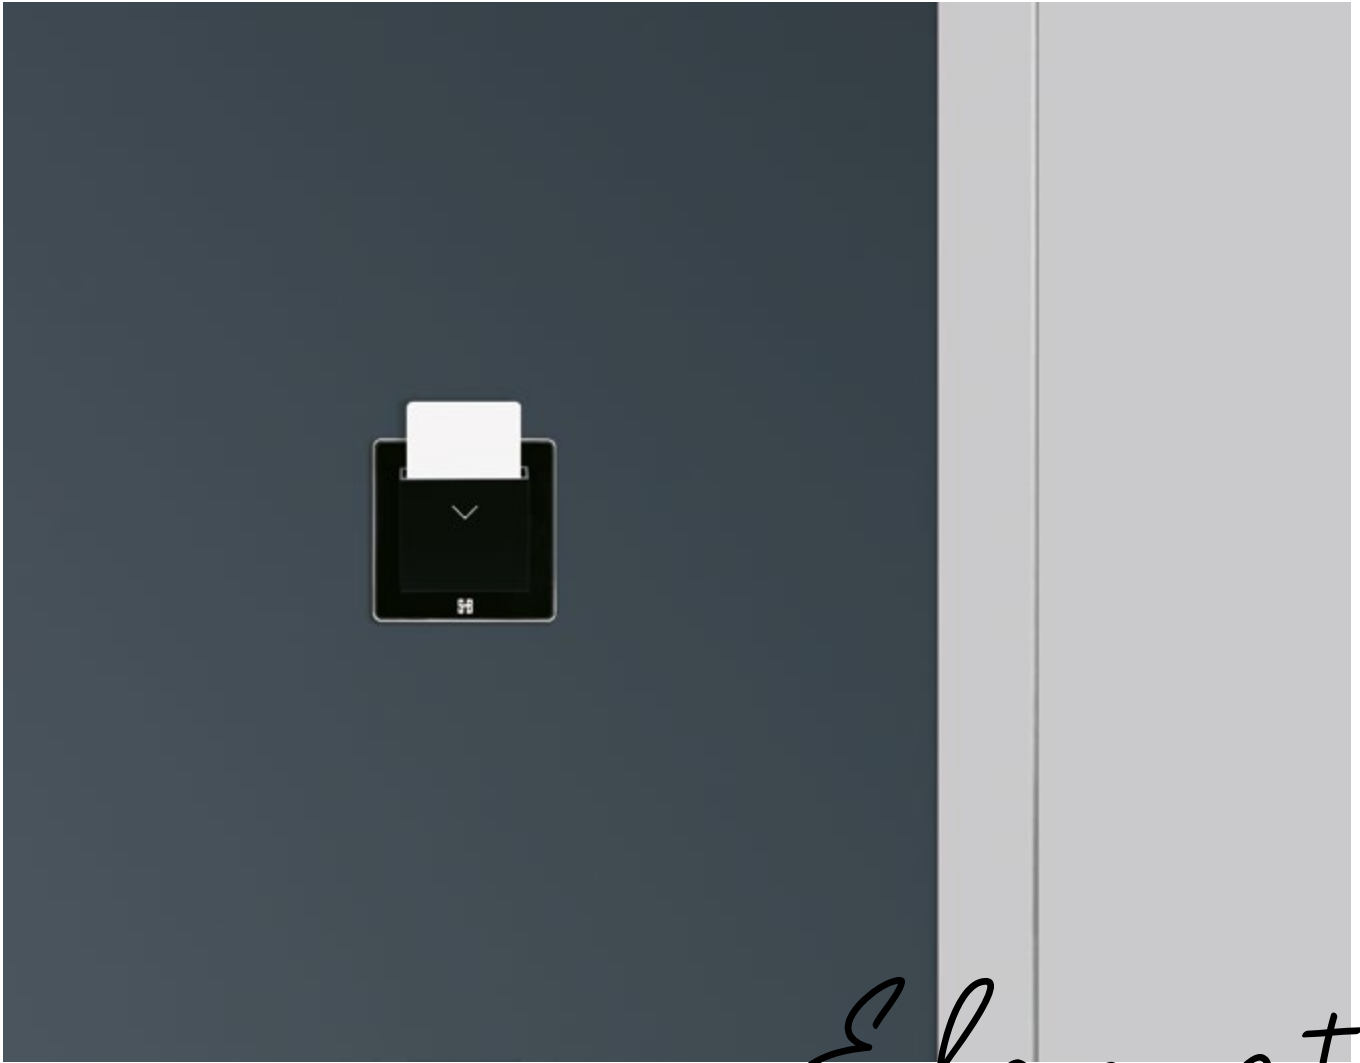

*Elegant*



Card in the slot



Back view



Installation box



Installation box for plasterboard